

SEALED IP66/67/68, 600 W AC-DC, COMPACT, EFFICIENT, POWER SUPPLY

DDP600 SC Series



**UV RESISTANT
I/O CABLING**

**IP66
IP67
IP68**

Certifications



Applications



FEATURES

- » Sealed enclosure, IP66/67/68 Ingress Protection grade
- » High efficiency (94% from 50% to 100% load)
- » Low stand-by power consumption (< 0.35 W)
- » Universal input voltage range (85 – 305 V_{AC})
- » Input inrush current limiting (<30 A)
- » 800 W peak power (up to 10 s)
- » Single 24 or 48 VDC voltages
- » Active PFC, EN61000-3-2 compliant (Class C, >25% load)
- » Low earth leakage current (typ. <400 µA, 264V_{AC}, 60 Hz)
- » Over temperature, OV, OC and SC protections.
- » Stand by +5 V, 1.5 A output.
- » Remote On / Off signal
- » IT approval to IEC/EN 60950-1 and IEC/EN 62368-1
- » LED lighting safety approval to UL8750
- » UV resistant input / output cables
- » RoHS 3 compliant (Directive 2015/863/EU)

MARKET SEGMENTS AND APPLICATIONS

- » Video Wall Display and SSL Lighting
- » Industrial Process Control and Automation
- » Telecommunications / Broadcasting
- » Harsh environment supply

PRODUCT DESCRIPTION

The DDP600 SC Series of industrial grade AC-DC power supplies provide the compact form factor, ingress protection index and high efficiency that the marketplace demands. It provides a steady 600 W of regulated DC power through the full 85 to 305 V_{AC} input range, all in a 4.92 x 9.86 x 2.36" form factor. The DDP600 SC series is available in an aluminium extruded chassis

having fins for an optimal heat dispersion via natural convection. Being its PWA assembling full potted within the enclosure, it offers a base plate that, once installed in contact with a system metallic frame, can be an effective path to dispel heat also through conduction helping thermal management.

The input / output connections are by flying wires fixed to the chassis through water tight glands which combined with the sealed enclosure give the power supply an IP66/67/68 ingress protection grade (IP68 characterized as 1 m depth for 40 days).

By converting energy at up to 94% efficiency, the DDP600 SC series generates less heat, facilitating optimal thermal management in space constrained environments, resulting in very high reliability. The DDP600 SC standard variant comes in 24 or 48 V_{DC} single output voltages (28, 36 and 52 V_{DC} can be developed upon project assessment).

The option variant (S) offers in addition, a +5 V_{DC} stand-by output and the following control signals: +/- remote sense, remote On/Off (-PS_Inhibit), power good (PS_Ok), I-share (ISHARE1+V_SLOGIC).

The power unit can be operated in a -30 to 70 °C ambient temperature being the output power de-rated above certain limits depending on the input AC.



It provides UV resistant Input / Output cabling.

Protection features include High Breaking capacity fuses on both AC lines, input under voltage lockout (IUV), output over-current (OC), output short-circuit (SC), output over-voltage (OV) and over-temperature (OT).

The DDP600 SC series comply with the IEC 60950-1 and IEC 62368-1 standards for Audio Video and IT equipment and UL8750 standard for LED lighting applications.


The DDP600 SC series meets the EN 55011, EN55032, EMC limits of Class B for conducted and radiated emissions as well as the IEC/EN61000-3, for harmonic and flicker, and IEC/EN 61000-6-2, EN 55024 for EMC immunity standards.

Model Coding and Output Ratings

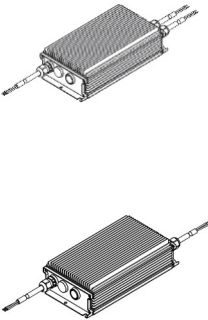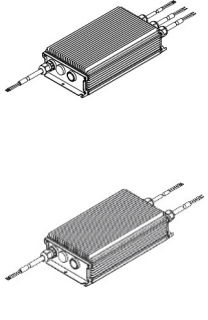Model Grade and Output Power	Output Voltages		Packages	
ME: MDP600-	24 V _{DC} : US24- 24 V _{DC} : US48-	Sealed Chassis: SC	 Standard	 Signals: -S

Model Code	V1 Nominal [V _{DC}]	I1 Rated ⁽¹⁾ [A]		I _{STBY} Rated ⁽¹⁾ [A]		Cooling [LFM]	Max Combined Output Power ⁽¹⁾ [W]	
		55 °C	70 °C	55 °C	70 °C		55 °C	70 °C
MDP600-US24-SC (-S)	24	25	16.6	1.5	1.5	Natural Convection	600	400
MDP600-US48-SC (-S)	48	12.5	8.8	1.5	1.5	Natural Convection	600	425

¹ Rated currents and combined power are referred to 55 °C ambient and V_{AC} ≥ 180 V_{RMS}.

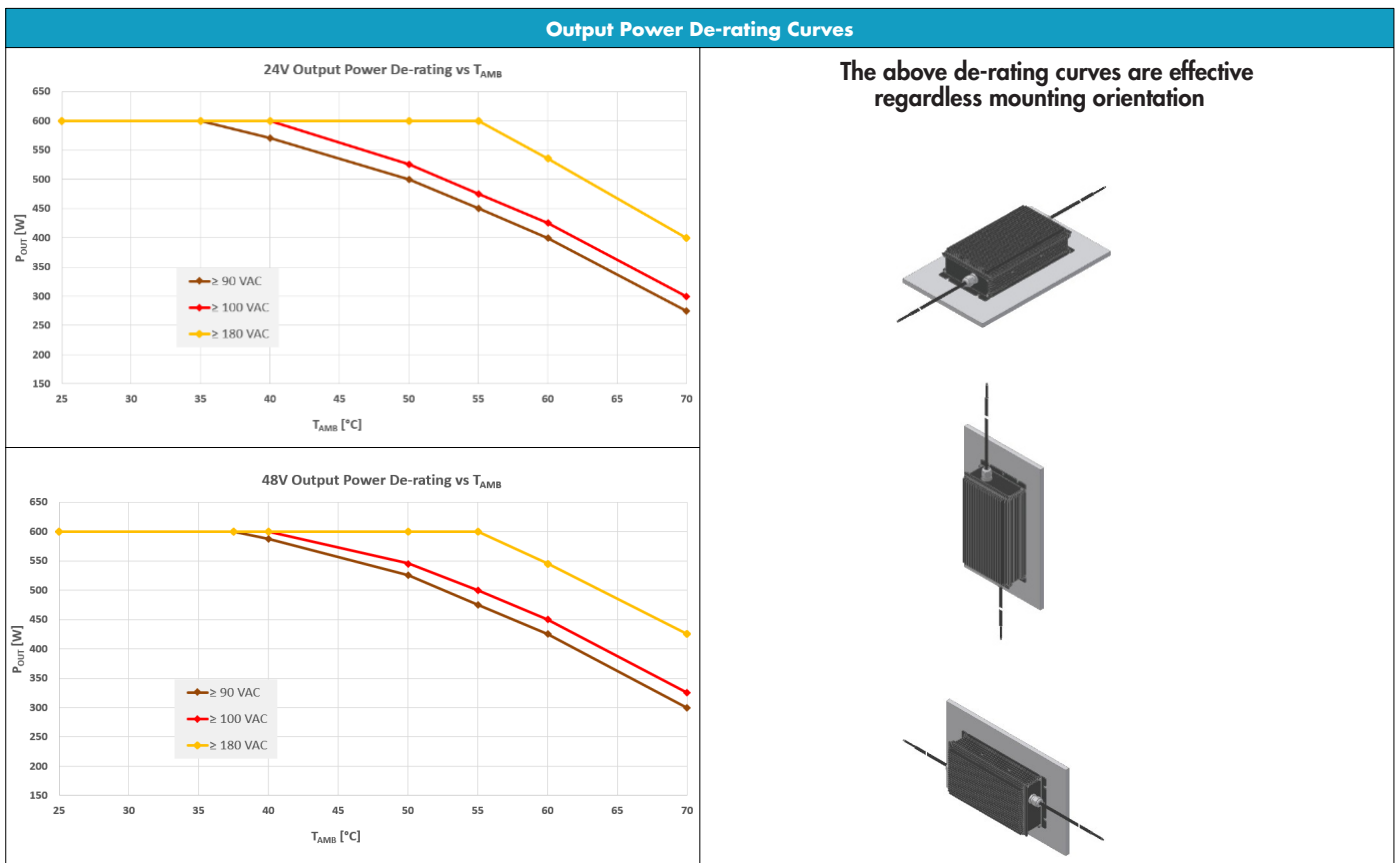

Input Specifications


Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
AC Input Voltage	PS starts and operates at 85 V _{AC} at all load conditions	85	100–277	305	V _{RMS}
DC Input Voltage	Built in fuses has been safety certified up to 250 V _{DC} . Operating the MDP600 above that limit up to 300 V _{DC} does require an external fuse protection.	170	-	300	V _{DC}
Input Frequency	440 Hz with reduced PFC and output power rating - Consult factory for details.	47	50/60	440	Hz
Input Current	RMS at 180 V _{AC} , maximum load, 50 / 60 Hz RMS at 85 V _{AC} , maximum load, 50 / 60 Hz	-	-	4.0 8.5	A
Inrush Current (peak)	Cold start, 25 °C ambient, full load 115 V _{AC} 230 V _{AC}	- -	- -	20 30	A
Fusing	High breaking, 10A, 250V on each AC lines.	-	-	10	A
Efficiency	At 115 V_{AC}, 20% rated load 50% rated load 100% rated load At 230 / 264 V_{AC}, 20% rated load 50% rated load 100% rated load	- - - - - - -	89 93 92 90 94 94	- - - - - -	%
Input Power Consumption	Power on, 115 V _{AC} , no load Power on, 230 V _{AC} , no load Stand by, 115, 230 V _{AC} , no load	- - -	- - -	5 4 0.35	W
Power Factor	From 50 to 100% rated load, 115, 230, 277 V _{AC} 50 / 60 Hz	-	-	-	-
THDi	From 50 to 100% rated load, 115, 230, 264 V _{AC} 50 / 60 Hz.	-	-	20	%
Harmonic Current Fluctuations and Flicker	Complies with EN 61000-3-2 at 230 V _{AC} , 50/60 Hz, Class A, D. Complies with EN 61000-3-2 Class C at 230 VAC, 50/60 Hz, >150 W load. Complies with EN 61000-3-3 at nominal voltages and full load.				
Earth Leakage Current	Normal conditions 115 V _{RMS} , 60 Hz 230 V _{RMS} , 50 Hz 264 V _{RMS} , 60 Hz 277 V _{RMS} , 60 Hz (worst case)	- - - -	170 290 - -	- - 460 490	μA

Output Specifications

Specification	Test Conditions / Notes	Min.	Nom.	Max.	Units
V1 Output Voltages	±0.5% set point accuracy RS+ closed on +V1, RS- closed on V1 RTN, at 20% load on option variant (S).	- -	24 48	- -	V
V1 Output Power Rating	Convection cooling (Refer to the de-rating curves above) Peak (less than 10 s, after P_OK high)	- -	- -	600 800	W
5V_{SB} Output Voltage	±3% set point accuracy, 20% load.	-	5	-	V
5V_{SB} Output Current		-	-	1.5	A
V1 Voltage Adjustment Range	Factory calibration upon customer request	-	-	±5	%V1
V1 Load-Line-Cross Regulation	V _{AC} : 85 – 305 V _{RMS} ; I ₁ : 0 – 100%	-	-	±2	%V1
5V_{SB} Load-Line-Cross regulation	V _{AC} : 85 – 305 V _{RMS} ; I _{5SB} : 0 – 100%	-	-	±5	%5V _{SB}
V1 Line Regulation	V _{AC} : 85 – 305 V _{RMS}	-	-	±0.1	%V1
Transient Response: V1, 5V_{SB} Voltage Deviation	25% load changes at 1 A/μs 24V at 1000 μF load / I _{OUT} > 2.5 A 48V at 560 μF load / I _{OUT} > 1.25 A 5V _{SB} at 560 μF load / I _{OUT} > 0.1 A	-	-	±5	%V1 %5V _{SB}
V1 Ripple and Noise	Rated load, Peak-to-peak, 20 MHz BW. (100 nF ceramic, 10 μF tantalum at load)	-	-	1	%V1
V1 Start-up Rise Time	85 < V _{IN} < 264, any load conditions.	10	-	100	ms
Start-up Delay	V1 in regulation after de-asserting PS_Inhibit V1 in regulation after AC is applied (worst case: 85 V _{AC}) 5V _{SB} in regulation after AC is applied (worst case: 85 V _{AC})	- - -	- - -	450 2050 1500	ms
Turn-on Overshoot		- -	- -	10 10	%V1 %V _{SB}
V1 Hold-up Time	At nominal V _{IN} , full load	16	-	-	ms
Minimum Load	V1 and 5V _{SB}	0	-	-	A
Maximum Load Capacitance	V1: 24 V _{DC} V1: 48 V _{DC}	- -	- -	16000 8000	μF
V1 Current Sharing Accuracy	Two units in parallel at I1 rated load. VS-Logic and I-Share signals connected together. RS+, RS- signals connected together and to the load.	45.5	-	54.5	%I1


Signals / Controls and Timing

Signal	Notes	Min	Typ.	Max	Unit
-PS_Inhibit	Active low. Input low voltage	0	-	1.5	V
	Input high voltage (IIN= 300 μ A)	3.5	-	5.5	V
	V1 disabled when -PS_Inhibit is pulled low				
	5V _{SB} not affected by -PS_Inhibit				
P_OK2	V1 enabled when -PS_Inhibit is floating or high				
	Logic level low (<10 mA sinking)	-	-	0.7	V
	Logic level high (100 μ A sourcing)	2.4	-	5.5	V
	Low to high time after V1 in regulation	40	-	350	ms
5V_{SB} Output	Power down warning time	1	-	-	ms
	Active and in regulation after a $85 < V_{AC} < 264$ is applied	-	-	1500	ms
	5V _{SB} not affected by PS_Inhibit				

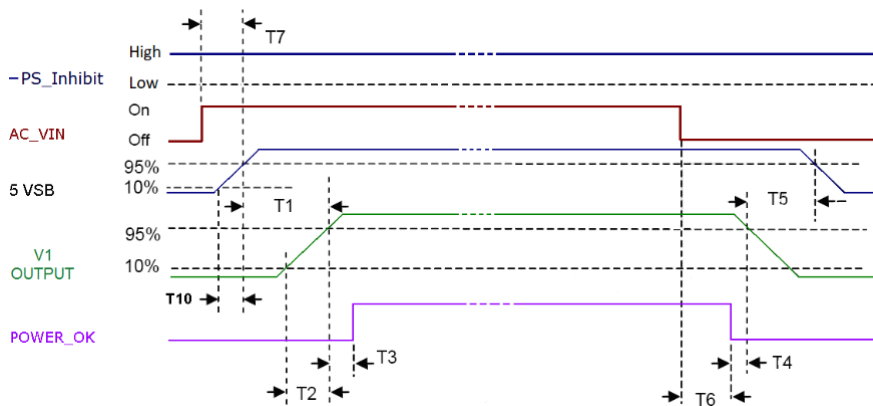

Above waveforms are expected with AC Input ON/OFF:

5V _{SB} On – V1 On	250 ms ≤ T1 ≤ 550 ms
V1 rise time	10 ms ≤ T2 ≤ 100 ms
5 V _{SB} Rise Time	3 ms ≤ T10 ≤ 40 ms
V1 On – POWER_OK delay	200 ms ≤ T3 ≤ 350 ms
Power down warning	T4 ≥ 1 ms
V1 Off – 5V _{SB} Off	T5 ≥ 0.5 s (V1 load > 25 W)
AC Off – POWER_OK low	T6 ≥ 15 ms
AC_On – 5V _{SB} turn on time	T7 ≤ 1.5 s

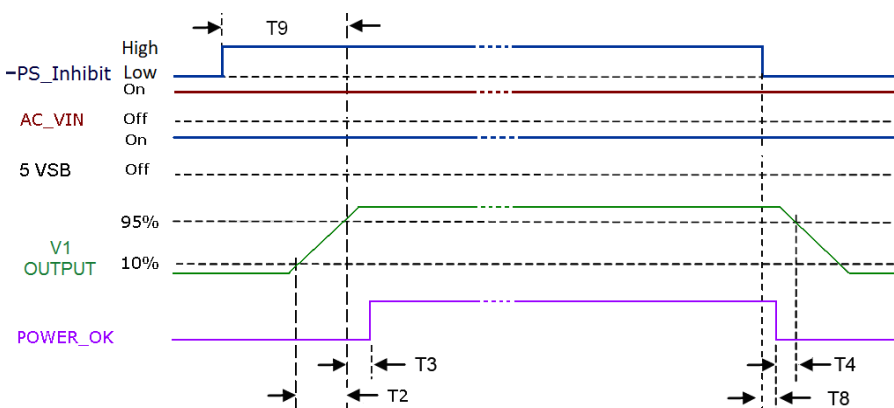

Above waveforms are expected with PS_Inhibit Signal On/Off state change:

V1 rise time	10 ms ≤ T2 ≤ 100 ms
V1 On – POWER_OK delay	200 ms ≤ T3 ≤ 350 ms
Power down warning	T4 ≥ 1 ms
PS_Inhibit – POWER_OK low timing	T8 ≤ 2 ms
PS_Inhibit – V1 On delay	T9 ≤ 450 ms

Protection Features

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
Input Under Voltage	Auto-recovering	58	65	75	V _{AC}
Input Fuse	High breaking, 10A, 250V on L and L1.	-	-	10	A
Over Current	At nominal input voltages				
	V1: Hiccup mode, auto-recovering (>10 s)	108	-	132	%I _{Rated}
	V1: Hiccup mode, auto-recovering (<10 s)	135	-	163	%I _{Rated}
	5V _{SB} : Hiccup mode, auto-recovering:	1.6	-	3.6	A
Short Circuit	At nominal input voltages				
	V1: Hiccup mode, auto-recovering.	-	-	-	
	5V _{SB} : Hiccup mode, auto-recovering.	-	-	-	
Over Voltage	V1, Power shut down, latch off.	120	-	145	%V _{NOM}
	5V _{SB} , Hiccup mode, auto-recovering.	-	-	150	
Over Temperature (on primary stage)	Shut down, latch off.	-	-	-	°C
Over Temperature (on secondary side)	Hiccup mode, auto-recovering.	-	-	-	°C
Isolation: Primary-to-Secondary	Reinforced	5660	-	-	V _{DC}
		4000	-	-	V _{AC}
Isolation: Input-to-Earth	Basic (1xMoPP) Production tested at 2121 V _{DC}	2121	-	-	V _{DC}
		1500	-	-	V _{AC}
Isolation: V1-to-5V _{SB}	Basic	100	-	-	V _{AC}
Isolation: Output-to-Earth	Basic (1xMoPP)	1500	-	-	V _{AC}
Equipment Protection Class	Class I				

Environmental Specifications

Specification	Test Conditions / Notes	Min	Nominal	Max	Units
Operating Temperature Range	No de-rating up to 55°C, at ≥ 180 V _{AC}	-30	-	55	°C
Operating Temperature Range with De-rating	See de-rating curves and conditions in the Output Specifications section	-	-	70	°C
Storage Temperature		-40	-	85	°C
Humidity	RH, Non-condensing Operating.	-	-	90	%
	Non-operating	-	-	95	%
Operating Altitude		-	-	5000	m
Shock	EN 60068-2-27 Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative).				
Vibration	EN 60068-2-64 Operating: Sine, 10 – 500 Hz, 1 g, 3 axes, 1 oct/min., 60 min. Random, 5 – 500 Hz, 0.02 g _{RMS} /Hz, 1 g _{RMS} , 3 axes, 30 min. Non-Operating: 5 – 500 Hz, 2.46 g _{RMS} (0.0122 g _{RMS} /Hz), 3 axes, 30 min.				
MTBF	Full Load, 40 °C ambient 80% Duty cycle, Telcordia SR-332 Issue 2	200.00.00	-	-	Hours
Useful Life	Worst nominal V _{IN} , 80% load, 40 °C ambient	-	10	-	Years

Electromagnetic Compatibility (EMC) – Emissions

Phenomenon	Conditions / Notes	Standard	Equipment/Performance Class
Conducted	115, 230, 277 V _{RMS} . Maximum load.	EN 55032 (ITE) EN 55011 (ISM) FCC Part 15	B
Radiated	The "S" variant compliance to the Class B is conditioned by the use of a common ground plane between the power supply and its load	EN 55032 (ITE) EN 55011 (ISM) FCC Part 15	B
Line Voltage Fluctuation and Flicker	At 20%, 50% and 100% maximum load. Nominal input voltages	EN 61000-3-3	
Harmonic Current Emission	230 V _{AC} input voltage, 50 / 60 Hz 230 V _{AC} 50 / 60 Hz, >150 W load	EN 61000-3-2 EN 61000-3-2	A, D C

Electromagnetic Compatibility (EMC) – Immunity

Phenomenon	Conditions / Notes	Standard	Test Level	Criteria
	Reference standards for ITE Reference standard for Industrial/IMS equipment	EN 55024 (ITE) EN 61000-6-2		
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A
Radiated Field	10 V/m, 80-1000 MHz, 1 KHz, 80% AM.	EN 61000-4-3	3	A
Electric Fast Transient	±2 kV on AC power port	EN 61000-4-4	3	A
Surge	±2 kV line to line; ± 4 kV line to earth on AC power port	EN 61000-4-5	4	A
Conducted RF Immunity	10 V _{RMS} , 0,15-80 MHz, 1 kHz, 80% AM	EN 61000-4-6	3	A
Dips and Interruptions	200 – 277 V_{AC}: Drop-out to 0% for 10 ms Dip to 40% for 5 cycles (100 ms) Dip to 70% for 25 cycles (500 ms) Drop-out to 0% for 5 s	EN61000-4-11 EN61000-4-11 EN61000-4-11 EN61000-4-11		A A A B
	100 – 127 V_{AC}: Drop-out to 0% for 10 ms Dip to 40% for 5 cycles (100 ms) Dip to 70% for 25 cycles (500 ms) Drop-out to 0% for 5 s	EN 61000-4-11 EN 61000-4-11 EN 61000-4-11 EN 61000-4-11		A A (de-rate to 150 W) A (de-rate to 400 W) B

Safety Agencies Approvals

Certification Body	Safety Standards and file numbers	Category
CSA/UL	CSA C22.2 No. 60950-1, UL 60950-1, UL 62368-1	Audio Video and Information Technology Equipment
	UL8750, CSA C22.2 No 250.13	Lighting
IEC IEC60950 CB Certification	IEC/EN 60950-1, IEC/EN 62368-1	Audio Video and Information Technology Equipment
CE	Directive 2014/35/EU: Electrical Safety: Low Voltage electrical equipment (LVD)	Audio Video and Information Technology Equipment
	Directive 2014/30/EU: Electromagnetic Compatibility (EMC)	
	Directive 2015/863/EU: RoHS 3	
Designed to meet IEC/EN/UL/CSA 61010-1 2 nd edition		

Outline Drawing and Connections

OVERALL DIMENSIONS: 125.0 x 250.5 x 60.0 mm (4.92 x 9.86 x 2.36 in)
WEIGHT: Standard 2770 g (6.11 lb); Signals (-S) 2850 g (6.28 lb)

SC Series

Standard Series

Signals Series (-S)

Input cable

WIRE COLOR	FUNCTION
BLACK	Line
GREEN	PG
WHITE	Neutral

OutputCable

WIRE COLOR	FUNCTION
RED	+ V1
BLUE	V1 RTN

24 V

48V

OutputCable

WIRE COLOR	SIGNAL NAME
BLACK	RTN
RED	+5V _{SB}
BROWN	RS-
GREEN	P OK
YELLOW	-PSINHIBIT
GREY	VS LOGIC
BLUE	I SHARE 1
WHITE	RS+

24 V

48V

Specifications appearing in Inission's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by Inission are as accurate as possible but, being given for general information, and are not binding on Inission. Inission makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and

services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. Inission assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.