

2X MOPP MEDICAL, 1200 W AC-DC COMPACT, EFFICIENT POWER SUPPLY

MDP1200 (FF, UCF, PCF) Series



Certifications



Applications



FEATURES

- » Universal input voltage range, 90 – 305 V_{AC}, MoOP; 90 – 264 V_{AC}, MoPP;
- » Input inrush current limiting;
- » 1200 W rated power;
- » High efficiency up to 94%;
- » Single 24 and 48 V_{DC} output voltage available;
- » Active PFC, EN61000-3-2 compliant (Class C, >25% load);
- » Low earth / touch leakage current;
- » Fan speed control function;
- » Over temperature, OV, OC and SC protections;
- » +12 V, 0.5 A; +5 V, 1 A Stand by outputs;
- » Built-in current sharing and OR-ing for parallel operation and N+1 redundancy;
- » Remote On / Off signal;
- » Power good and remote sense signals;
- » All packages fit 1U applications;
- » Medical safety approval to IEC 60601-1 3rd edition, 2x MoPP rated and BF appliances compatible;
- » IEC 60601-1-2 4th edition EMC compliant;
- » RoHS 3 compliant (Directive 2015/863/EU);
- » Up to 4000 m altitude operation (MoPP);
- » PMBus™ digital power-management protocol supported.

MARKET SEGMENTS AND APPLICATIONS

- » X-Ray / CT Scanner;
- » Dental Equipment;
- » Laboratory / Analysis Equipment;
- » Medical Devices / Applications.

PRODUCT DESCRIPTION




The medical grade MDP1200 series of AC-DC power supplies offer increased embedded power in three (3) compact 1U compatible packages, high energy efficiency and wide versatility. The series provides a steady 1200 W of regulated DC power through 180-305 V_{AC} and 1000 W through 85-137 V_{AC} input voltage ranges in a single output of 24 or 48 V_{DC}. The MDP1200 series is available in three (3) compact 1U height compatible packages; one, enclosed with a built-in front mounted pair of fans and two (available only 24V variant), U-shaped chassis with or without protective cover, to facilitate system integration. By converting AC power at a 94% typical efficiency rate, the MDP1200 series generates very little heat allowing for optimal thermal management. The series offers a 12 V_{DC}, 0.5 A and a 5 V_{DC}, 1 A stand-by outputs and the full set of protection features including high breaking capacity fuses on both AC lines, input under voltage lockout (IUV), output over-current (OC), output short-circuit (SC), output over-voltage (OV) and over-temperature (OT). The MDP1200 series supports digital power management over the PMBus™ communications protocol enabling interoperability with and easy integration into a system. In addition, analogue control signals include Power Good (P_OK), Remote On / Off (+/-PS_Inhibit) and Sense terminals (RS+, RS-). Multiple MDP1200 units may be used in parallel mode for redundancy and / or higher power, made possible with the internal OR-ing and current sharing functions. The dual front-mounted fan version provides the full output rated power up to 60 °C. Its fan rotation speed is digitally controlled to guarantee the minimum required airflow, minimizing audible noise for quiet operation, and enhancing the power supply service life time. Rated power is also achieved in the U-chassis variants, with or without perforated cover, when providing them with an 800 LFM

airflow from top side up to 55 °C. All variants can be operated up to 70 °C de-rating the output power.

The MDP1200 series complies with the 3rd edition of the IEC60601-1 and ANSI/AAMI ES/EN 60601-1 safety standards for medical equipment requiring 2x MoPP protection grade. It is suitable for BF rated medical equipment under specific conditions.

The MDP1200 series meets the EN 60601-1-2 EMC limits of Class B for conducted and radiated emissions as well as the IEC/EN61000-3 for flicker and harmonics content. It also meets the IEC 60601-1-2 4th edition for EM immunity.

Model Coding and Output Ratings

Model Grade, Output Power	Output Voltages	Packages and Cooling	
Medical Grade :MDP1200-	24 V _{DC} : -US24-	 Front Mounted Fans: -FF	 U-Chassis External Forced Air Cooling: -UCF (only available for the 24V variant)
	48 V _{DC} : -US48-		 Perforated Cover External Forced Air Cooling: -PCF (only available for the 24V variant)

Output Parameter	24 V		48 V	
	180-305 V _{AC} 163-300 V _{DC}	85-137 V _{AC} 120-163 V _{DC}	180-305 V _{AC} 163-300 V _{DC}	85-137 V _{AC} 120-163 V _{DC}
V1 Nom Voltage	24 V _{DC}		48 V _{DC}	
V1 Adjust Range	±5% V _{NOM}			
V1 Rated Power	1200 W	1000 W	1200 W	1000 W
V1 Rated Current	50 A	41.7 A	25 A	20.8 A
V1 Line Regulation	±0.1%			
V1 Load Line Cross Regulation	±2%			
V1 Ripple & Noise	1% Peak-to-peak			
V1 Transient response	±5%V1 to 25% load change at 1 A/μs			
V1 Over Current Protection	<75 A		<37.5 A	
V1 Over Voltage protection	116% V _{NOM} < V _{OUT} < 145% V _{NOM}			
V1 Max Out Capacitance	16000 μF		8000 μF	
12 V _{SB} Nominal Voltage	12 V _{DC} (stand-by output voltage is referred to the same V1 output voltage return)			
12 V _{SB} Rated Current	0.5 A (maximum +12 V _{SB} and +5 V _{SB} combined output power is 6 W)			
12 V _{SB} Ripple & Noise	120 mV Peak-to-peak			
12 V _{SB} Line Cross Regulation	±5%			
5 V _{SB} Nominal Voltage	5 V _{DC} (stand-by output voltage is referred to the same V1 output voltage return)			
5 V _{SB} Rated Current	1 A (maximum +12 V _{SB} and +5 V _{SB} combined output power is 6 W)			
5 V _{SB} Ripple & Noise	50 mV Peak-to-peak			
5 V _{SB} Load, line cross Regulation	±5%			

Input Specifications

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Unit
AC Input Voltage	PS starts at 85 V _{AC} at all load conditions Operating input voltage range MDP1200 is designed to operate with a square or trapezoidal input voltage wave form (i.e. from UPS)	85	100-277	305	V _{RMS}
DC Input Voltage	Built in fuses has been safety certified up to 250 V _{DC} . Operating the MDP1200 above that limit up to 300 V _{DC} , does require an external fuse protection. (*)	120	-	300	V _{DC}
Input Frequency		47	50/60	63	Hz
Input Current	At 180 V _{AC} , maximum load, 50 / 60 Hz At 85 V _{AC} , 1000 W load, 50 / 60 Hz 163 V _{DC} , maximum load 120 V _{DC} , 1000 W	-	-	8.0 14.5 9.0 10.0	A _{RMS} A
Inrush Current	At power-on asserted Cold start, 25 °C ambient, full load Any point of the AC input sine 230 V _{AC} 277 V _{AC}	-	-	30 50	A
Fusing	High breaking, 16 / 20 A, 277 V _{AC} (250 V _{DC}) on each AC lines.	-	-	16 / 20	A
Efficiency	24, 48 V variants: At 120 V _{AC} , 20% rated load 50% rated load 100% rated load At 230 V _{AC} , 20% rated load 50% rated load 100% rated load	88 92 92 90 93 94	- - - - - -	- - - - - -	%
Input Power Consumption	At power on, no load, 100-277 V _{AC} range, FF At power on, no load, 100-277 V _{AC} range UCF/PCF Stand by, no load, nominal 100-277 V _{AC} range	- - -	7.0 6.0 4.0	- - -	W
Power Factor	Any nominal input line voltage, 50/60 Hz, from 50 to 100% maximum load	1.12	-	-	-
THDi	From 50 to 100% rated load, 100-277 V _{AC} , 50/60 Hz.	-	-	20	%
Harmonic Current Fluctuations and Flicker	Complies with EN 61000-3-2 at 230 V _{AC} , 50/60 Hz, Class A, D. Complies with EN 61000-3-2 Class C at 230 V _{AC} , 50/60 Hz, >300 W load. Complies with EN 61000-3-3 at nominal voltages and full load.				
Earth Leakage Current	Normal conditions 115 V _{RMS} , 60 Hz 230 V _{RMS} , 50 Hz 264 V _{RMS} , 60 Hz (worst case)	- - -	130 240 -	- - 400	μA
Touch Leakage Current	264 V_{RMS}, 60 Hz Normal Condition (NC) Single Fault Condition (SFC)	- -	- -	100 500	μA
Patient Leakage Current	264 V_{RMS}, 60 Hz Normal Condition (NC) Single Fault Condition (SFC)	- -	- -	100 500	μA


(*) Suggested fuse SIBA 5012434.16 and fuse holder SIBA 5105805.1

Output Specifications


Specification	Test Conditions / Notes	Min.	Nom.	Max.	Units
V1 Output Voltages	±0.5% set point accuracy RS+ closed on +V1, RS- closed on V1 RTN, at 6% load.	-	24 48	-	V
V1 Output Power Rating	FF variant at 180 – 305 V _{AC} UCF, PCF variants at 180-305 V _{AC} , 800 LFM FF variant at 85 – 137 V _{AC} UCF, PCF variants at 85 – 137 V _{AC} , 800 LFM			1200 1200 1000 1000	W
12_{V_{SB}} Output Voltage		-	12	-	V
12_{V_{SB}} Output Current	FF, UCF and PCF packages up to 70 °C	-	-	0.5	A
5_{V_{SB}} Output Voltage		-	5	-	V
5_{V_{SB}} Output Current	FF, UCF and PCF packages up to 70 °C	-	-	1	A
V1 Voltage Adjustment Range	Manually by push up and down buttons	-	-	±5	%V1
V1 Load-Line-Cross Regulation	V _{AC} : 85 – 305 V _{RMS} ; I ₁ : 0 – 100%	-	-	±2	%V1
5_{V_{SB}}, 12_{V_{SB}} Load-Line-Cross regulation	V _{AC} : 85 – 305 V _{RMS} ; I _{SB} : 0 – 100%	-	-	±5	%V _{SB}
V1 Line Regulation	V _{AC} : 85 – 305 V _{RMS}	-	-	±0.1	%V1
Transient Response: V1, 12_{V_{SB}}, 5_{V_{SB}} Voltage Deviation	25% load changes at 1 A/μs 24V at 1000 μF load / I _{OUT} > 2.5 A 48V at 560 μF load / I _{OUT} > 1.25 A 12 V _{SB} , 5 V _{SB} at 0-2200 μF load	-	-	±5	%V _{SB}
V1 Ripple and Noise	Rated load, Peak-to-peak, 20 MHz BW. (100 nF ceramic, 10 μF tantalum at load)	-	-	1	%V1
V1 Start-up Rise Time	85 < V _{IN} < 305, any load conditions.	10	-	150	ms
Start-up Delay	V1 in regulation after de-asserting PS_Inhibit V1 in regulation after AC is applied (worst case: 85 V _{AC}) 5 V _{SB} in regulation after AC is applied (worst case: 85 V _{AC})	-	-	1700 2200 500	ms
Turn-on Overshoot		-	-	10 10	%V1 %V _{SB}
V1 Hold-up Time	At nominal V _{IN} , full load SEMI F47-0706 compliant at ≥208 V _{AC} 50% sag (104 V) 30% sag (145 V) 20% sag (166 V)	10 200 500 1000	- - - -	- - - -	ms
Minimum Load	V1, 12 V _{SB} , 5 V _{SB}	0	-	-	A
Maximum Load Capacitance	V1: 24 V _{DC} V1: 48 V _{DC}	-	-	16000 8000	μF
V1 Current Sharing Accuracy	Parallel operation up to four units. Two units in parallel at I1 rated load. I-Share signals connected together. RS+, RS- signals connected together and to the load. Max load at start up 1200 W, operating 2000 W, 180 ± 305 V _{AC} . Max load at start up 1000 W, operating 1667 W, 85 ± 137 V _{AC} . (referred to -FF, -PCF and -UCF)	40	-	60	%I1
V1 Remote Sense	RS+ and RS- power path voltage loss compensation	-	-	0.12	V

Output Power De-Rating Curves


Front Fan (FF); 24, 48 V
Any orientation, V1 nominal

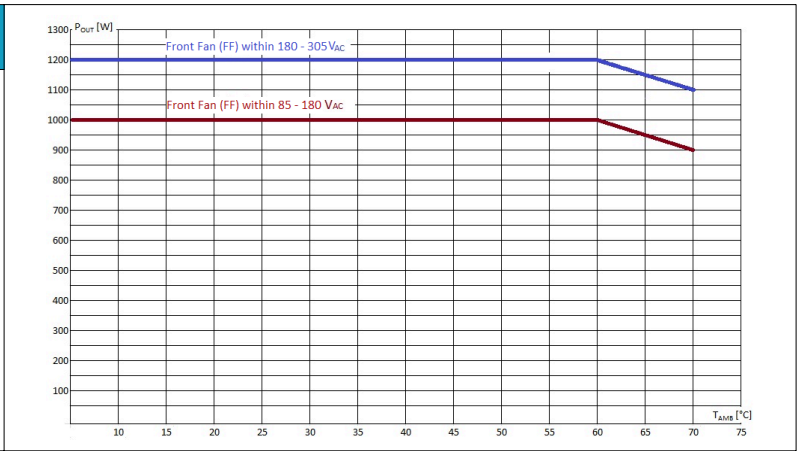

U-Chassis and Perforated Cover
Forced Air Cooling (UCF, PCF); 24 V
Air flow from top, V1 nominal

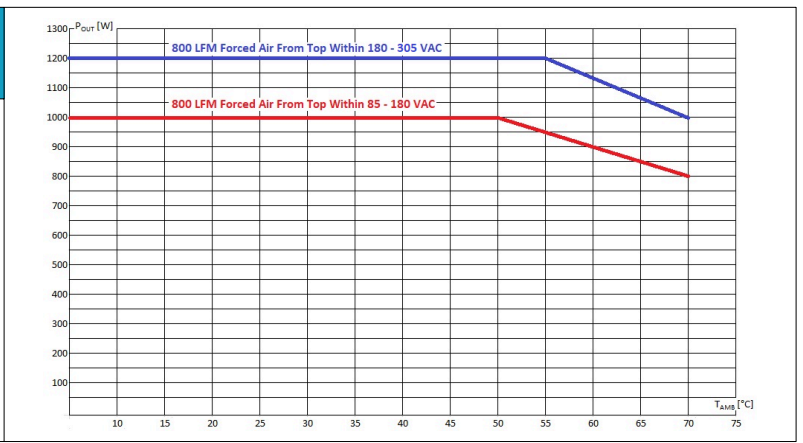

U-Chassis and Perforated Cover
Forced Air Cooling (UCF, PCF); 24 V
Air flow from AC side, V1 nominal

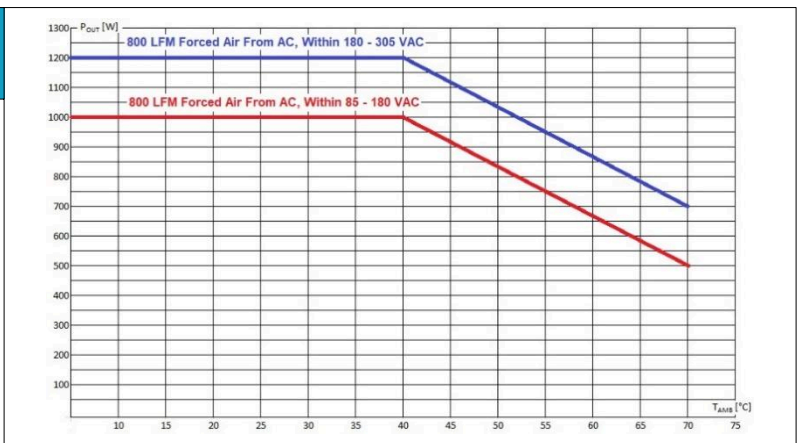

PMBus

The MDP1200 does support communication according the PMBus 1.2 protocol via SDA, SCL and #SMBALERT signals as defined in the SMBus Specification version 2.0.

The power supply shall not load the SMBus if it has no input power (SCL & SDA lines should go to High-Z).

The pull-up resistors (2.2 k Ω) for these signals shall be external to the power supply and referenced to an external +3.3V bus voltage.

The DSP circuits inside the power supply are powered by the standby output.

The PMBus is active whatever input power is applied to the power supply or a parallel redundant power supply in the system, provided that their 12_{V_{SB}} are connected in parallel.

Maximum speed of SMBus is 100 kHz.

The ADDR0 and ADDR1 signals, are inputs to the power supply that control the PMBus address assigned to the power supply.

On the system side, the ADDR0 and ADDR1 signals will either be connected to return through a 1 k Ω pull-down resistor or connected to +3.3V external bus voltage through a 1 k Ω pull-up resistor.

The address shall be derived from the logic of this pin as indicated on Outline Drawing and Connections section.

The power supply is a slave only on SMBus device.

For a comprehensive description of MDP1200 PMBus management, do refer to the application note, "AN_MDP-DDP1200 PMBus Mgt_

Rev00". Examples of MDP1200 parameters available through communication bus are:

- » Input voltage status;
- » Output voltages +V1 measured value;
- » Output current on +V1 measured value;
- » Current sharing status;
- » Thermal health measured value;
- » Fan health status;
- » Power-On / Working hours;
- » Product information;
- » Status information;

Failures shall be reported by PMBus for all failure types:

- » Fan fault;
- » Protections failure (OV, OC, OT);
- » Voltages out of specification.

Base Signals / Controls

(ACCESSIBLE FROM SIGNAL CONNECTOR P204)

Signal	Notes	Min	Typ.	Max	Unit
+PS_Inhibit (Active High)	Input low voltage ($I_{IN} = 0 \mu A$)	0	-	0.8	V
	Input high voltage ($I_{IN} = 500 \mu A$ at 5.5 V)	2.5	-	5.5	
	V1 disabled when PS_Inhibit is pulled high				
	V1 enabled when PS_Inhibit is floating or low				
	5 V _{SB} and 12 V _{SB} not affected by PS_Inhibit				
-PS_Inhibit (Active Low)	Input low voltage ($I_{IN} = -800 \mu A$ at 0 V)	0	-	0.8	V
	Input high voltage ($I_{IN} = -200 \mu A$ at 2.5 V)	2.5	-	5.5	
	($I_{IN} = 700 \mu A$ at 5.5 V)				
	V1 disabled when -PS_Inhibit is pulled low				
	V1 enabled when -PS_Inhibit is floating or high				
	5 V _{SB} and 12V _{SB} not affected by -PS_Inhibit				
Power_OK (*) (PS_OK)	Logic level low (<10 mA sinking)	-	-	0.7	V
	Logic level high (200 μA sourcing)	2.4	-	3.45	
	Low to high time after V1 in regulation	150	-	350	
	Power down warning time	2	-	-	ms
I_Share	The I_SHARE signals shall be daisy chained among power supplies operating in parallel. On a single power supply operating it provides current measurement on V1 output. On multiple power supplies operating in parallel, it provides current measurement on master V1output.				
SDA, SCL, #SMBALERT, ADDR0, ADDR1	These are signals which support PMBus communication protocol as specified in the application note AN_MDP-DDP1200 PMBus Mgt_Rev00.				
RSVD RX, RSVD TX	Mainly intended for internal Inission Power use, these RX and TX signals - available at the output signal connector P204 - may be used to access some DSP functions (monitoring, threshold settings, debug functions). These signals work as an UART Rx/Tx port and can also work as a RS-232 Rx/Tx port by building in the "RS-232 LINE DRIVERS/RECEIVERS" IC				
5V_{SB} Output (**)	Active and in regulation after an $85 < V_{AC} < 305$ is applied Not affected by PS_Inhibit. Available on P204, pin#4			500	ms
12V_{SB} Output (***)	Active and in regulation after an $85 < V_{AC} < 305$ is applied Not affected by PS_Inhibit. Available on P204, pin#16			500	ms

(*) When V1 is On, a P_OK low may indicates V1 under voltage condition.
When two DDP1200 operate in parallel, P_OK low in one unit indicates that it is not sharing the expected amount of current (current sharing fault). A 3.3 k Ω internal pull up to a 3.3 V internal reference voltage is used; do not add any other external pull up.


(**) The 5_{vSB} outputs of two or more DDP1200s operating in parallel, cannot

be connected in parallel in turn, since doing so results in power supplies damage.

(***) The 12_{vSB} outputs of two or more DDP1200s operating in parallel can be connected in parallel in turn, taking into account that the maximum available power will not be higher of a single operating power supply one.


Base Signals / Controls Timing

AC/DC INPUT OFF-TO-ON AND ON-TO-OFF TIMINGS:

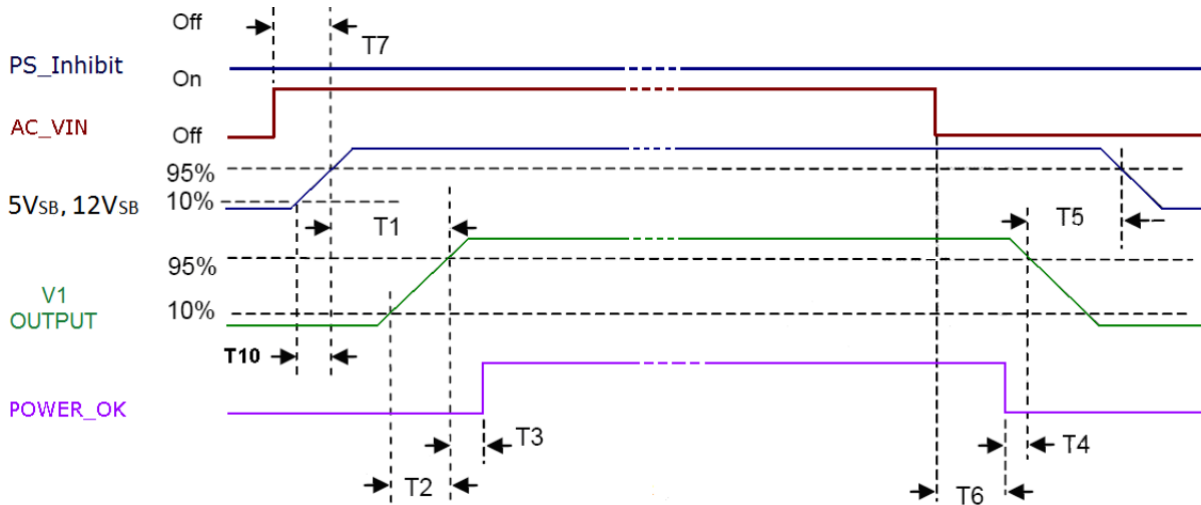

$12 V_{SB}/5 V_{SB}$ On to V1 On	$250 \text{ ms} \leq T1 \leq 1700 \text{ ms}$
V1 rise time	$10 \text{ ms} \leq T2 \leq 150 \text{ ms}$
$12 V_{SB}/5 V_{SB}$ rise time	$3 \text{ ms} \leq T10 \leq 150 \text{ ms}$
V1 On - POWER_OK delay	$150 \text{ ms} \leq T3 \leq 350 \text{ ms}$
Power down warning	$T4 \geq 2 \text{ ms}$
V1 Off to $12 V_{SB}/5 V_{SB}$ Off	$T5 \geq 0.5 \text{ s}$ (V1 load > 25 W)
AC Off to POWER_OK low	$T6 \geq 8 \text{ ms}$
AC On to $12 V_{SB}/5 V_{SB}$ On	$T7 \leq 500 \text{ ms}$

AC/DC INPUT OFF-TO-ON AND ON-TO-OFF TIMINGS:

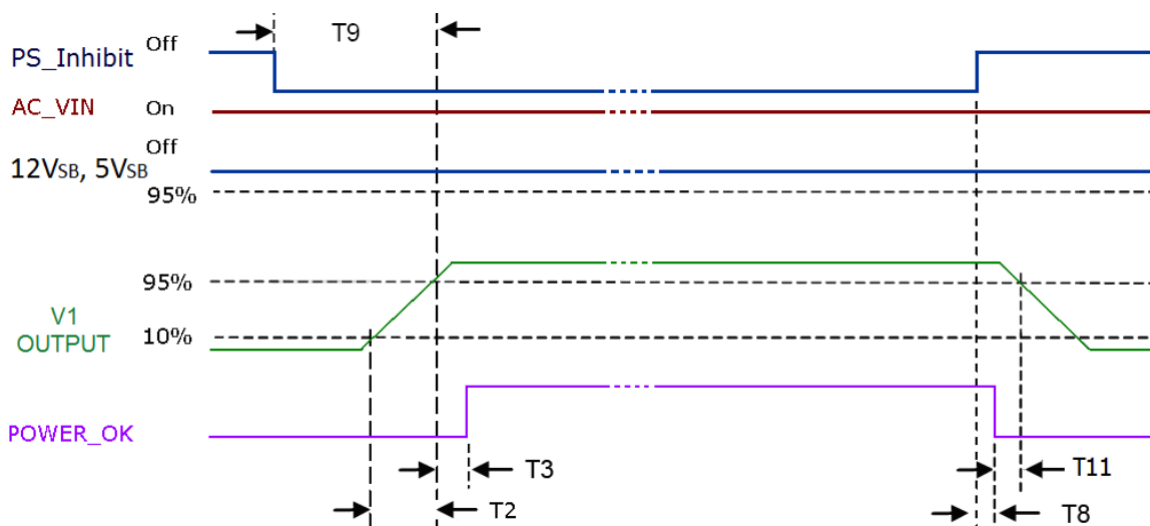

V1 rise time	$10 \text{ ms} \leq T2 \leq 150 \text{ ms}$
V1 On - POWER_OK delay	$150 \text{ ms} \leq T3 \leq 350 \text{ ms}$
Turn-Off warning	$T11 \geq 1 \text{ ms}$
PS_Inhibit - POWER_OK low delay	$T8 \leq 3 \text{ ms}$
PS_Inhibit - V1 On delay	$T9 \leq 1700 \text{ ms}$

Protection Features

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
Input Under Voltage	Auto-recovering, hiccup mode.	58	75	82	V _{AC}
Input Fuse	High breaking, 16 / 20 A, 277 V _{AC} (250 V _{DC}) on each AC lines.	-	-	16/20	A
Over Current	At nominal input voltages V1: Hiccup mode, auto-recovering 5 V _{SB} : Auto-recovering 12 V _{SB} : Hiccup mode, auto-recovering	-	-	150	%I _{Rated} A A
Short Circuit	At nominal input voltages V1: Hiccup mode or latch 5 V _{SB} : Auto-recovering 12 V _{SB} : Hiccup mode, auto-recovering.	-	-	-	
Over Voltage	V1, Power shut down, latch off. 12 V _{SB} : Hiccup mode, auto-recovering.	116	-	145	%V _{NOM}
Over Temperature (ambient)	Hiccup mode, auto-recovering.	70	-	-	°C
Over Temperature (on secondary side)	Hiccup mode, auto-recovering.	-	-	-	°C
Fan Fault Protection	Relevant to the "-FF" variant. The DSP monitors the signals (frequency generator) provided by both fans. If one fan fails, the DSP asserts maximum speed the other fan and provides an alarm indication through PMBus. If both fans fail, the DSP provides an alarm indication through LED and PMBus and after 20 s, does shut down V1. PS INHIBIT or AC/DC input have to be cycled to resume operations, after removed the fault.				
Isolation: Primary-to-Secondary	Reinforced	5660 4000	- -	- -	V _{DC} V _{AC}
Isolation: Input-to-Earth	Basic Production tested at 2642 V _{DC}	2642 1865	- -	- -	V _{DC} V _{AC}
Isolation: Output-to-Earth	Basic	1500	-	-	V _{AC}
Means Of Protection: Primary to secondary	2x MoPP (IEC 60601-1 3 rd edition) at 90 – 264 V _{AC} , 50/60 Hz (120-300 V _{DC}) up to 4000 m 2x MoOP (IEC 60601-1 3 rd edition) at 90 – 305 V _{AC} , 50/60 Hz (120-300 V _{DC}) up to 4000 m				
Means Of Protection: Input to Protection Earth	1x MoPP (IEC 60601-1 3 rd edition) at 90 – 264 V _{AC} , 50/60 Hz (120-300 V _{DC}) up to 4000 m 1x MoOP (IEC 60601-1 3 rd edition) at 90 – 305 V _{AC} , 50/60 Hz (120-300 V _{DC}) up to 4000 m				
Means Of Protection: Output to Protection Earth	1x MoPP (IEC 60601-1 3 rd edition) at 100 – 250 V _{AC} , 50/60 Hz up to 4000 m				
Equipment Protection Class	Class I, compatible with BF (Body Floating) ME (Medical Equipment).				

Environmental Specifications

Specification	Test Conditions / Notes	Min	Nominal	Max	Units
Operating Temperature Range	No de-rating up to 60 °C (FF) and up to 55 °C (UCF/PCF) See de-rating curves above MDP1200 starts at -40 °C upon warm up delay	-20	-	60	°C
Operating Temperature Range with De-rating	See de-rating curves and conditions in the Output Specifications section	-	-	70	°C
Storage Temperature Transportation Temperature	As per IEC/EN 60721-3-1 Class 1K4 As per IEC/EN 60721-3-2 Class 2K4	-40	-	85	°C
Humidity	RH, Non-condensing Operating. Non-operating	-	-	90 95	% %
Operating Altitude	MoPP (90 – 264 V _{AC} , 50/60 Hz, 120 – 300 V _{DC}) MoOP (90 – 305 V _{AC} , 50/60 Hz) Power de-rating above 1800 m	-	-	4000 4000	m
Shock	EN 60068-2-27 Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative).				
Vibration	EN 60068-2-64 Operating: Sine, 10 – 500 Hz, 1 g, 3 axes, 1 oct/min., 60 min. Random, 5 – 500 Hz, 0.02 g ² /Hz, 1 gRMS, 3 axes, 30 min. Non-Operating: 5 – 500 Hz, 2.46 gRMS (0.0122 g ² /Hz), 3 axes, 30 min.				
MTBF	Full load, 25 °C ambient, 100% duty cycle, Full load, 40 °C ambient, 75% duty cycle Telcordia SR-332 Issue 2	700.000 600.000	- -	- -	Hours
Useful Life	Nominal V _{IN} , 80% load, 40 °C ambient (IPC9592)	-	7	-	Years

Electromagnetic Compatibility (EMC) – Emissions

Phenomenon	Conditions / Notes	Standard	Equipment/Performance Class
Conducted	115, 230 V _{RMS} , Maximum load.	EN 60601-1-2 (Medical)	B
Radiated		EN 60601-1-2 (Medical)	B (*)
Line Voltage Fluctuation and Flicker	At 20%, 50% and 100% maximum load. Nominal input voltages	EN 61000-3-3	
Harmonic Current Emission	230 V _{AC} input voltage, 50 / 60 Hz 230 V _{AC} , 50 / 60 Hz, >300 W load	EN 61000-3-2 EN 61000-3-2	A, D C

(*) Performance referred to the enclosed package with additional HF chokes on input, output power and signal cables.

Radiated emission relevant to the UCF and PCF package variants, should be assessed at system level.

Electromagnetic Compatibility (EMC) – Immunity

Phenomenon	Conditions / Notes	Standard	Test Level	Criteria
	Reference standard for the medical version	EN 60601-1-2, 4th Edition		
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A
Radiated Field	10 V/m, 20-2700 MHz, 1 KHz, 80% AM.	EN 61000-4-3	3	A
Electric Fast Transient	±2 kV on AC power port for 1 minute	EN 61000-4-4	3	A
Surge	±2 kV line to line; ± 4 kV line to earth on AC power port	EN 61000-4-5	4	A
Conducted RF Immunity	10 V _{RMS} , 0,15-80 MHz, 1 kHz, 80% AM	EN 61000-4-6	3	A
Dips and Interruptions	200 – 264 V_{AC}: Drop-out to 0% for 10 ms Dip to 40% for 5 cycles (100 ms) Dip to 70% for 25 cycles (500 ms) Drop-out to 0% for 5 s 100 – 127 V_{AC}: Drop-out to 0% for 10 ms Dip to 40% for 5 cycles (100 ms) Dip to 70% for 25 cycles (500 ms) Drop-out to 0% for 5 s	EN61000-4-11 EN61000-4-11 EN61000-4-11 EN61000-4-11 EN 61000-4-11 EN 61000-4-11 EN 61000-4-11 EN 61000-4-11		A (*) A (de-rate to 900 W) A B A (*) A (de-rate to 400 W) A (de-rate to 700 W) B

(**) Performance referred to 5_{VSB}, 12_{VSB} and V1 (PS_OK goes to low level after 8 ms as per timing described at page 8)

Safety Agencies Approvals


Certification Body	Safety Standards and file numbers	Category
CSA / UL	CSA C22.2 No.60601-1, ANSI/AAMI ES60601-1 3rd Edition + A1	Medical
	IEC/EN 60601-1 3rd edition+A1	Medical
CE	Directive 93/42/CEE: Safety Requirement of the Medical Device	Medical
	Directive 2014/30/EU: Electromagnetic Compatibility (EMC)	
	Directive 2015/863/EU: RoHS 3	
Meets all essential requirements of the standard IEC/EN/UL/CSA 61010-1 2nd edition		

Outline Drawing and Connections

U-CHASSIS FORCED AIR COOLING (-UCF)

OVERALL DIMENSIONS: 101.6 x 234.0 x 41.0 mm (4.00 x 9.21 x 1.61 in)

WEIGHT: 1150 g (2.53 lb)

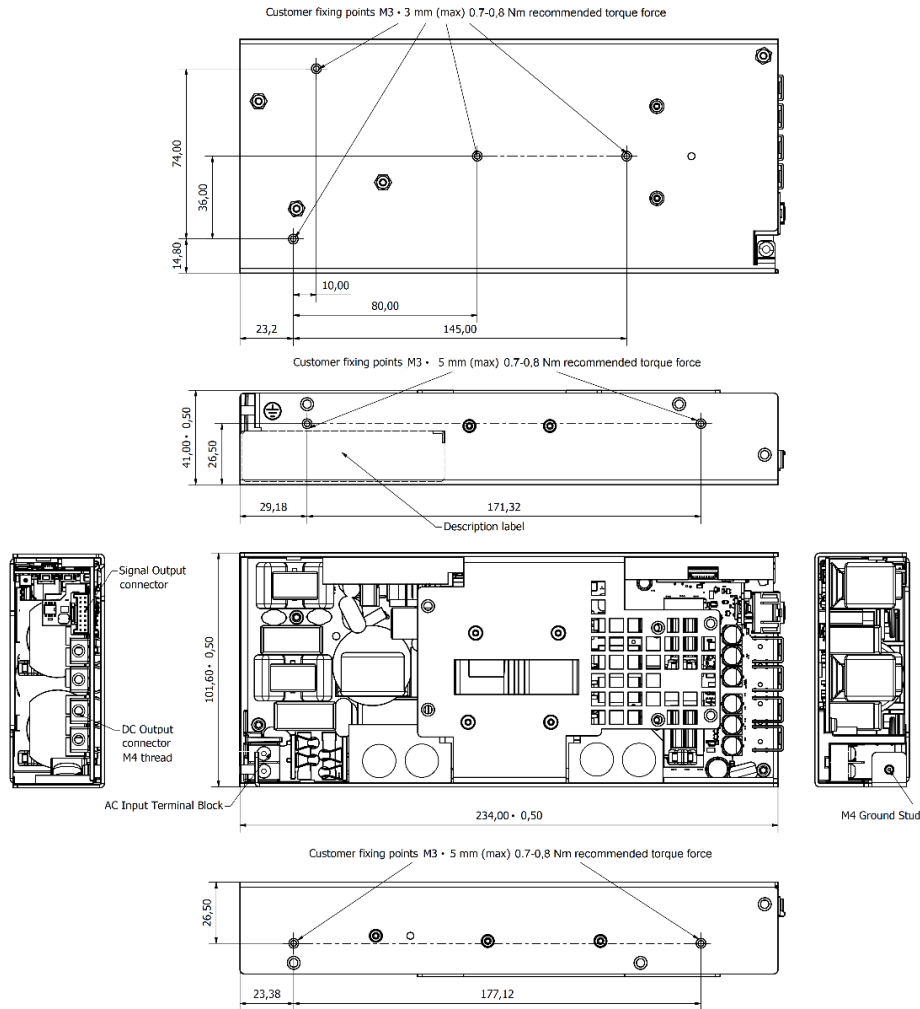


AC INPUT CONNECTIONS		DC OUTPUT CONNECTIONS		SIGNAL CONNECTOR		ADDITIONAL CONTROL FUNCTIONS	
P1: AMTEK TB25C-B02P-13-00A-L M4 GROUND STUD		P200, P201, P202, P203: BRASS M4 THREADED TERMINAL (tight to 0.8-1Nm, max deep screws 7 mm)		P204: MOLEX 501876-1640		SW600, SW601, DL600:	
Ref.	Function	Ref.	Function	Ref.	Function	Ref.	Function
1	Line 1		24 V	1	RMT (-)	SW600	V1_ADJ (UP)
2	Line 2		Optional	2	RMT (+)		SW601
3	Protection Earth	P200		3	I-SHARE	DL600	
		P201	-	4	+5 V _{SB}		Off
		P202	V1 RTN	5	PS_INHIBIT	Blinking Green	Input power good, standby active, V1 inhibited
		P203	V1 RTN	6	PS_OK		
				7	SCL	Steady or Blinking red	Power Supply Fault
				8	SDA		
				9	#SMBALERT		
				10	ADDR0		
				11	-PS_INHIBIT		
				12	ADDR1		
				13	RSVD_RX (OUT)		
				14	RSVD_TX (OUT)		
				15	RTN		
				16	+12 V _{SB}		

Outline Drawing and Connections

PERFORATED COVER FORCED AIR COOLED (-PCF)

OVERALL DIMENSIONS: 101.6 x 234.7 x 41.0 mm (4.00 x 9.24 x 1.61 in)

WEIGHT: 1250 g (2.75 lb)

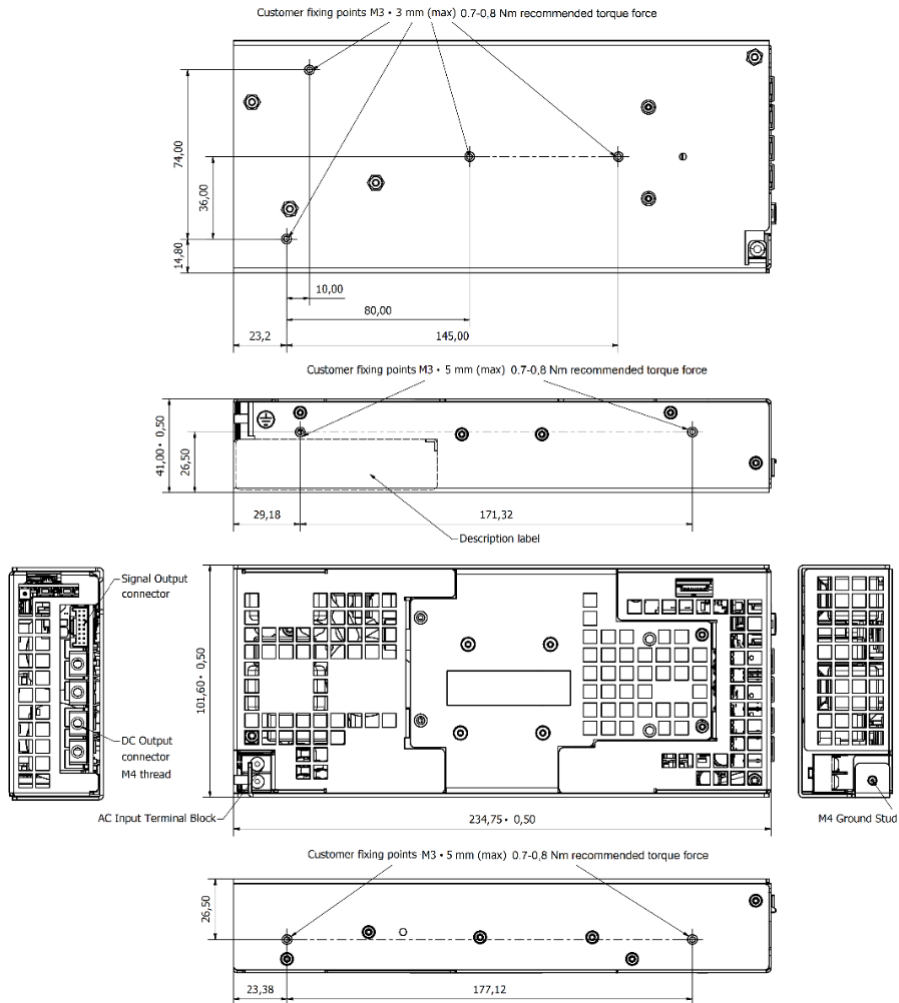


AC INPUT CONNECTIONS		DC OUTPUT CONNECTIONS		SIGNAL CONNECTOR		ADDITIONAL CONTROL FUNCTIONS	
P1: AMTEK TB25C-B02P-13-00A-L M4 GROUND STUD		P200, P201, P202, P203: BRASS M4 THREADED TERMINAL (tight to 0.8-1Nm, max deep screws 7 mm)		P204: MOLEX 501876-1640		SW600, SW601, DL600:	
Ref.	Function	Ref.	Function	Ref.	Function	Ref.	Function
1	Line 1		24V	1	RMT (-)	SW600	V1_ADJ (UP)
2	Line 2		Optional	2	RMT (+)		
3	Protection Earth	P200		3	I-SHARE	SW601	V1_ADJ (DOWN)
		P201	-	4	+5 V _{SB}		
		P202	V1 RTN	5	PS_INHIBIT	DL600	Bi-colour LED
		P203	V1 RTN	6	PS_OK	Off	No AC/DC input power provided
				7	SCL		
				8	SDA	Blinking Green	Input power good, standby active, V1 inhibited
				9	#SMBALERT		
				10	ADDR0		
				11	-PS_INHIBIT	Steady Green	V1 Active
				12	ADDR1	Steady or Blinking red	Power Supply Fault
				13	RSVD_RX (OUT)		
				14	RSVD_TX (OUT)		
				15	RTN		
				16	+12 V _{SB}		



Outline Drawing and Connections

FRONT MOUNTED FAN (-FF)


OVERALL DIMENSIONS: 101.6 x 264.12 x 41.0 mm (4.00 x 10.40 x 1.61 in)

WEIGHT: 1550 g (3.42 lb)

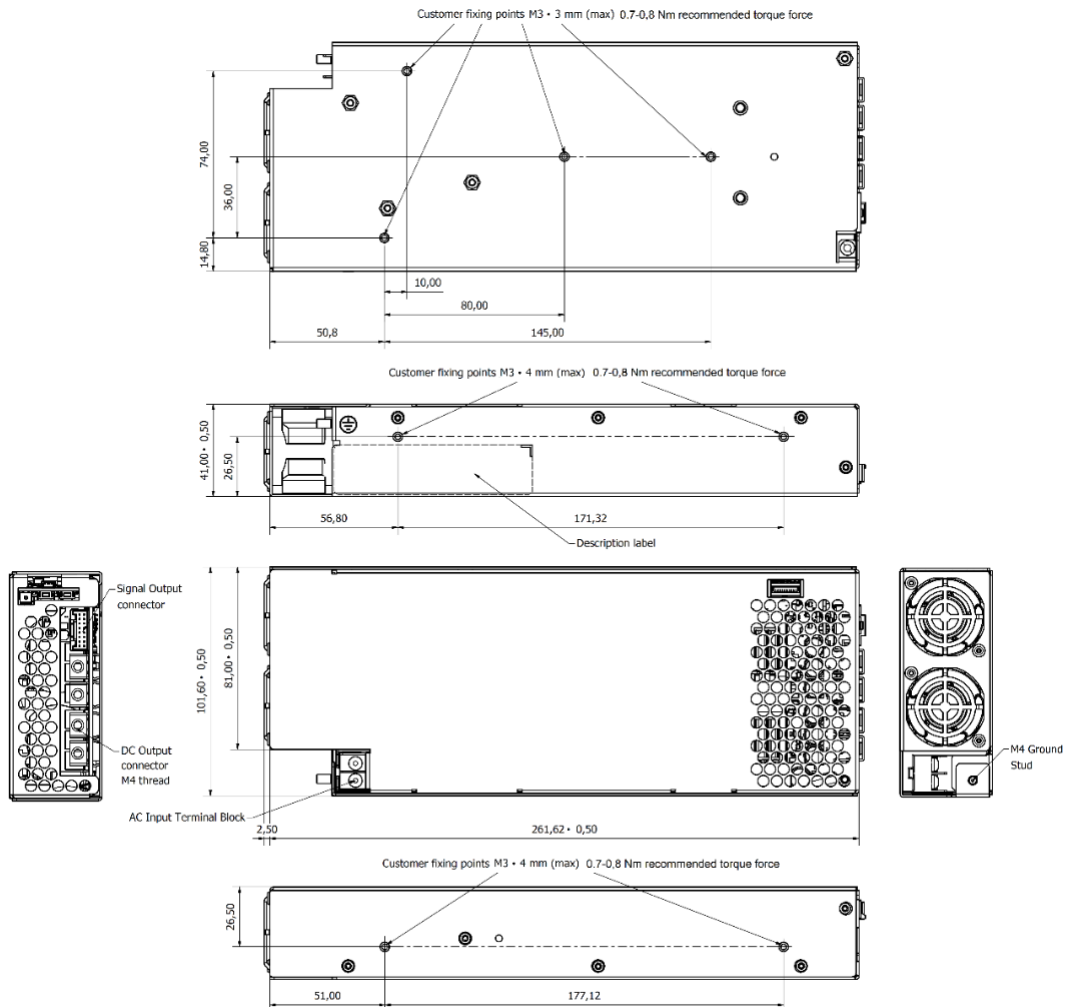

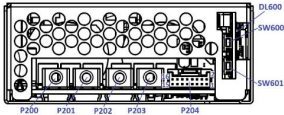AC INPUT CONNECTIONS		DC OUTPUT CONNECTIONS		SIGNAL CONNECTOR		ADDITIONAL CONTROL FUNCTIONS		
P1: AMTEK TB25C-802P-13-00A-L M4 GROUND STUD		P200, P201, P202, P203: BRASS M4 THREADED TERMINAL (tight to 0.8-1Nm, max deep screws 7 mm)		P204: MOLEX 501876-1640		SW600, SW601, DL600:		
								
Ref.	Function	Ref.	Function	Ref.	Function	Ref.	Function	
1	Line 1		24 V Optional	24 / 48 V	1	RMT (-)	SW600	V1_ADJ (UP)
2	Line 2				2	RMT (+)		
3	Protection Earth	P200			3	I-SHARE	SW601	V1_ADJ (DOWN)
		P201	-		4	+5 V _{SB}		
		P202	V1 RTN	V1 RTN	5	PS_INHIBIT	DL600	Bi-colour LED
		P203	V1 RTN	-	6	PS_OK	Off	No AC/DC input power provided
					7	SCL		
					8	SDA	Blinking Green	Input power good, standby active,
					9	#SMBALERT		V1 inhibited
					10	ADDR0		
					11	-PS_INHIBIT	Steady Green	V1 Active
					12	ADDR1	Steady or Blinking red	Power Supply Fault
					13	RSVD_RX (OUT)		
					14	RSVD_TX (OUT)		
					15	RTN		
					16	+12 V _{SB}		

Protection Earth Connection Instructions

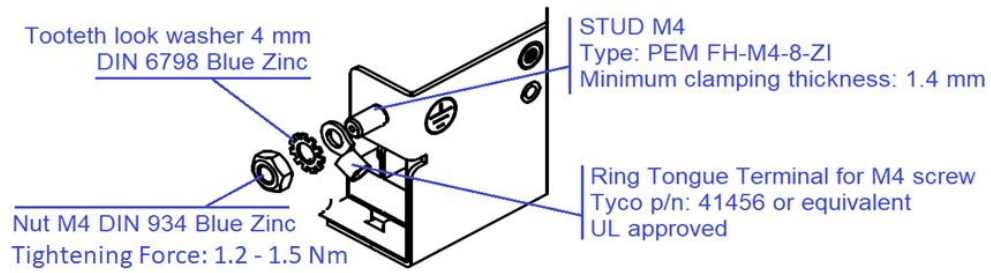

Specifications appearing in Inission's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by Inission are as accurate as possible but, being given for general information, and are not binding on Inission. Inission makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information

solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. Inission assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.