

## MAIN FEATURES

- Nominal input voltage: 220/277/347/400/440/480 V<sub>AC</sub>
- Suitable for IEC Class I installations
- Max output power 600 W
- Output current range 190 – 1880 mA programmable (Through DALI-2 or DMX-RDM)
- Output voltage range 260 – 520 V<sub>DC</sub>
- IEEE 1789 Flicker Recommended Practice Compliant
- No load (Dim-to-Off) power consumption <0.5 W (Compliant with Commission Regulation (EU) 2019/2020, SLR)
- Remote installation capability up to 300 m
- DALI-2 or DMX-RDM control up to 33 fps
- Surge immunity levels: 6 kV (L-N) 10 kV (L/N-PE)
- Certified to CE, UKCA, ENEC, UL and RCM; design compliant with CCC
- Thermal protection for LED Modules
- Lifetime: >50.000 hours at maximum load
- Short circuit, overpower, and over voltage protections
- Adjustable dimming and Constant Lumen Output functions
- DiIA Part 251 and Part 253 specifications implemented
- Remote firmware update
- Emergency Lighting compatible
- IP66, IK08 rated enclosure




## DESCRIPTION

This datasheet details the electrical, mechanical, and environmental specifications of a Class I, input-to-output isolated, 600 W single output constant current, DALI-2 or DMX-RDM programmable LED driver. Its IP66 and IK08 enclosure, including a built-in junction box and high surge immunity, make it suitable for outdoor applications. Its electrical characteristics make it suitable for TV broadcasting applications.


This LED driver has been specifically conceived and intended to supply a high quality and programmable constant current to high end professional LED modules capable of very high luminous flux for sport venues lighting, large area lighting, horticulture, tunnel, and high-mast lighting in general. The technical performances ensure also higher energy efficiency and higher current quality than most common and multi-purpose low / medium power control-gear.

These LED drivers are ENEC certified according to the IEC/EN 61347-2, IEC/EN 61347-1, IEC/EN 62384; UL listed to ANSI / UL8750, and CSA C22.2 No.250; RCM certified to AS 61347-2-13, and AS/NZS 61347-1.

The DLD600HE is compatible to emergency lighting – EL – operating conditions.

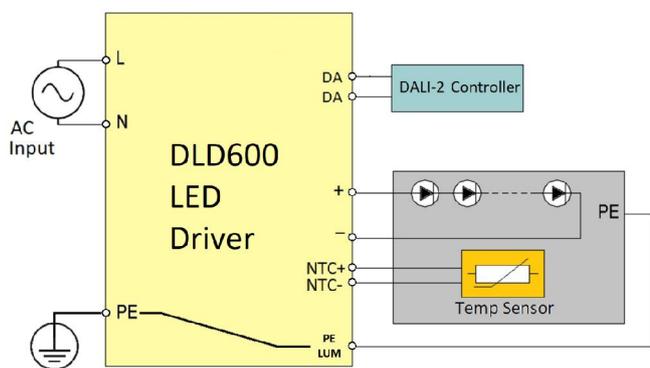

DALI-2

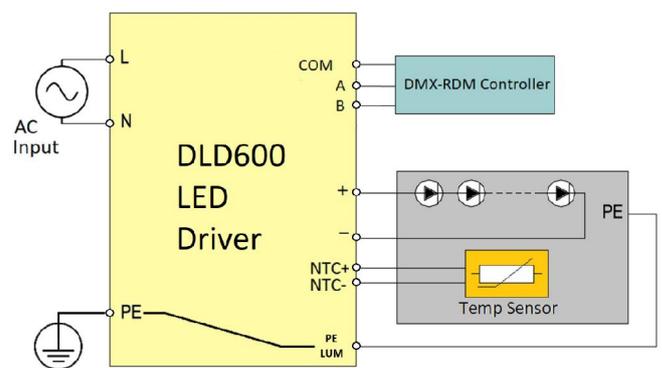


DMX-RDM

## MODEL CODING AND OUTPUT RATINGS

Ordering Code	Control	Pout Max [W]	V <sub>OUT</sub> Operative Range [V <sub>DC</sub> ]	I <sub>OUT</sub> Programmable Settings [mA]			Full Power V <sub>OUT</sub> Range [V <sub>DC</sub> ]	Full Power I <sub>OUT</sub> Adj. Range [A]
				Min	Factory Set	Max		
DLD600HE-H120-DA (RHPS589AH-A-1)	DALI-2	600	260 ÷ 520	190	1200	1880	319 ÷ 520	1.16 ÷ 1.88
DLD600HE-H120-DX (RHPS589BH-A-1)	DMX-RDM	600	260 ÷ 520	190	1200	1880	319 ÷ 520	1.16 ÷ 1.88

NOTE: The above ratings refer to 480 V<sub>AC</sub> input voltage, 25 °C ambient temperature, and full load operating conditions.

## OUTPUT CURRENT-VOLTAGE DIAGRAM (MAX OUTPUT POWER LIMITING)

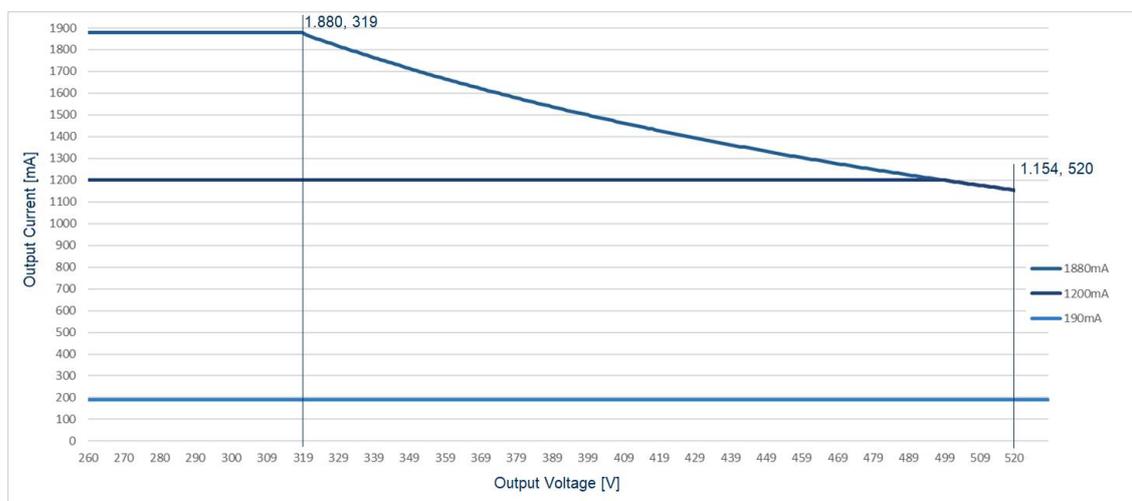

## INPUT SPECIFICATION

Specification	Test Conditions / Notes	Min	Nom	Max	Units
AC Input Voltage	220/240/277/347/400/440/480 V <sub>AC</sub>	198	220-480	528	V <sub>AC</sub>
Input Frequency		47	50/60	63	Hz
Efficiency	220 V <sub>AC</sub> , 1.16 A	92	94	-	%
	220 V <sub>AC</sub> , 1.88 A	92	94	-	
	277 V <sub>AC</sub> , 1.16 A	92.5	94.5	-	
	277 V <sub>AC</sub> , 1.88A	92	94	-	
	480 V <sub>AC</sub> , 1.16 A	93	95	-	
Input Current	480 V <sub>AC</sub> , 1.88 A	92.5	94.5	-	A
	220 V <sub>AC</sub> 100% load	-	-	3.2	
	277 V <sub>AC</sub>	-	-	2.7	
	400 V <sub>AC</sub>	-	-	1.8	
No-Load Power Consumption	480 V <sub>AC</sub>	-	-	1.5	W
	At 230 V <sub>AC</sub> , 50 Hz, 25 °C T <sub>AMB</sub>	-	-	0.5	
	Driver electrically connected to the load, Dim-to-Off (0 A output current)	-	-	0.5	
		-	-	0.5	
Power Factor	220 V <sub>AC</sub> At 25 °C T <sub>AMB</sub>	0.98	0.99	0.99	
	277 V <sub>AC</sub> Min values refer to 50% load	0.94	0.98	0.98	
	400 V <sub>AC</sub> Nominal Values refer to 80 % load	0.96	0.97	0.97	
	480 V <sub>AC</sub> Max Values refer to 100% load	0.90	0.95	0.96	
THD	220 V <sub>AC</sub> At 25 °C T <sub>AMB</sub>	3.5	4.0	6.5	%
	277 V <sub>AC</sub> Max values refer to 50% load	4.5	5.5	8	
	400 V <sub>AC</sub> Nominal Values refer to 80 % load	7	9	12	
	480 V <sub>AC</sub> Min Values refer to 100% load	10.5	12.5	16	
Inrush Current (peak) Cold start	230 V <sub>AC</sub>	-	14	15	A
	277 V <sub>AC</sub> Full Load, 25 °C T <sub>AMB</sub>	-	18	20	
	400 V <sub>AC</sub>	-	23	25	
Heart Leakage Current	480 V <sub>AC</sub>	-	27	30	μA
	At 480 V <sub>AC</sub> , 60 Hz, Full Load, 25 °C ambient	-	-	750	
Harmonic Current	Complies with EN-61000-3-2, Class C load >25%				

## OUTPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min	Nom	Max	Units
Total Output Power	No derating up to 50 °C ambient temperature	-	-	600	W
Output Voltage		260	-	520	V <sub>DC</sub>
Output Current	Programmable via DALI or DMX, 1200 mA factory set	190	-	1880	mA
Minimum dimming level		6	10	11	%I <sub>MAX</sub>
Ripple Current_HF	High frequency (>15 kHz) I <sub>HFpk-pk</sub> /I <sub>outAVG</sub> at 1880 mA, 320 V 220, 400, 480 V <sub>AC</sub>	-	4	10	%
Ripple Current_LF	High frequency (<1 kHz) I <sub>HFpk-pk</sub> /I <sub>outAVG</sub> at 1880 mA, 320 V 220, 400, 480 V <sub>AC</sub>	-	1.5	2	%
Flicker	IEEE 1789 Flicker Recommended Practice Compliant				
Current Set Accuracy	V <sub>IN</sub> : 198÷528 V <sub>AC</sub> ; I <sub>OUT</sub> : 1.88 A, V <sub>OUT</sub> : 300÷320 V; 25, 50, -40 °C T <sub>AMB</sub>	-	±3	±5	%I <sub>OUT</sub>
Load Regulation	At 400 V <sub>AC</sub> , -40, 25, 50 °C T <sub>AMB</sub> , 300÷320 V <sub>OUT</sub>	-	±1.2	±3	%I <sub>OUT</sub>
Line Regulation	V <sub>IN</sub> : 198÷528 V <sub>AC</sub> , -40, 25, 50 °C T <sub>AMB</sub> , Max Load	-	±0.05	±1	%I <sub>OUT</sub>
Temperature Regulation	At 400 V <sub>AC</sub> , -40, 25, 50 °C T <sub>AMB</sub> , Max Load	-	±1.5	±5	
Turn-on Time	Max output power (320 V, 1.88 A), -40 °C T <sub>AMB</sub> , any input voltage	-	1.3	2	s
Max Remote distance	The maximum distance between the LED driver and the supplied LED module, connected with an appropriate cable section shall ensure a total voltage drop < 5 V, the total V <sub>F</sub> shall not exceed the max V <sub>OUT</sub> rating, and the total output power (cable + lamps) won't exceed the rated value.				
Start-up Overshoot Current	At 220 ÷ 480 V <sub>AC</sub> ; 300 V <sub>DC</sub> , 1.88 A; 320 V <sub>DC</sub> , 1.88 A	-	-	10	%I <sub>OUT</sub>

## PROTECTION FEATURES

Specification	Test Conditions / Notes	Min	Nom	Max	Units
Input Under Voltage	V <sub>IN</sub> : 198 V; 25 °C T <sub>AMB</sub> ; Max Load. No damage. Duty cycle	167	-	176	V
Output Over Voltage	V <sub>IN</sub> : 400 V; 25 °C T <sub>AMB</sub> ; Max Load. Shut down and auto recovery	540	-	550	V
Output Under Voltage	Shut down, automatic detection every 60 s	200	-	260	V
Output Short-Circuit	Shut down, automatic detection every 60 s	-	-	-	-
Overpower	Output current will dim to keep maximum output power to the maximum limit. Removing overload, normal operation is recovered.	-	-	600	W
Internal OTP vs T <sub>AMB</sub>	The LED Driver checks the internal temperature every 60 seconds. If an OT condition is detected, the output current is gradually reduced. In any condition the output current will not decrease below 20% of the set current	-	-	-	°C
No Load V <sub>OUT</sub>		-	-	550	V
Installation Class	Class I (with PE)				
Isolation	Input-to-Output (Double or reinforced insulation, 4x U + 2000 V)	4372	-	-	V <sub>AC</sub>
	Input-to-DALI/DMX (Double or reinforced insulation, 4x U + 2000 V)	4500	-	-	
	Output-to-DALI/DMX (Double or reinforced insulation, 4x U + 2000 V)	4200	-	-	
	Input-to-PE/Chassis (Basic insulation, 2x U + 1000 V)	1830	-	-	
	Output-to-PE/Chassis (Basic insulation, 2x U + 1000 V)	2100	-	-	


## INRUSH CURRENT DATA AND DRIVERS PER MCB CALCULATION

The maximum number of LED drivers connectable to a single MCB is reported in the following table for each nominal input voltage. Due to the different kinds of circuit breakers available on the market, this table is just for reference.

Nominal [V <sub>AC</sub> ]	Inrush Current Data		# Drivers For Each Circuit Breaker														
			Type B					Type C					Type D				
			10A	16A	20A	25A	32A	10A	16A	20A	25A	32A	10A	16A	20A	25A	32A
230	15	1080	2	4	5	6	8	2	4	5	6	8	2	4	5	6	8
400	25	1120	1	3	3	4	6	2	4	5	6	8	2	4	5	6	8
480	30	1200	1	2	3	4	5	3	5	6	8	10	4	7	9	10	10

## DALI / DMX OUTPUT CONTROLS



- Dimming range: 10-100% of the max current at 220, 400, 480 V<sub>AC</sub>, 3 A 200 V<sub>DC</sub>, -40 / 25 °C ambient temperatures, ±2% accuracy

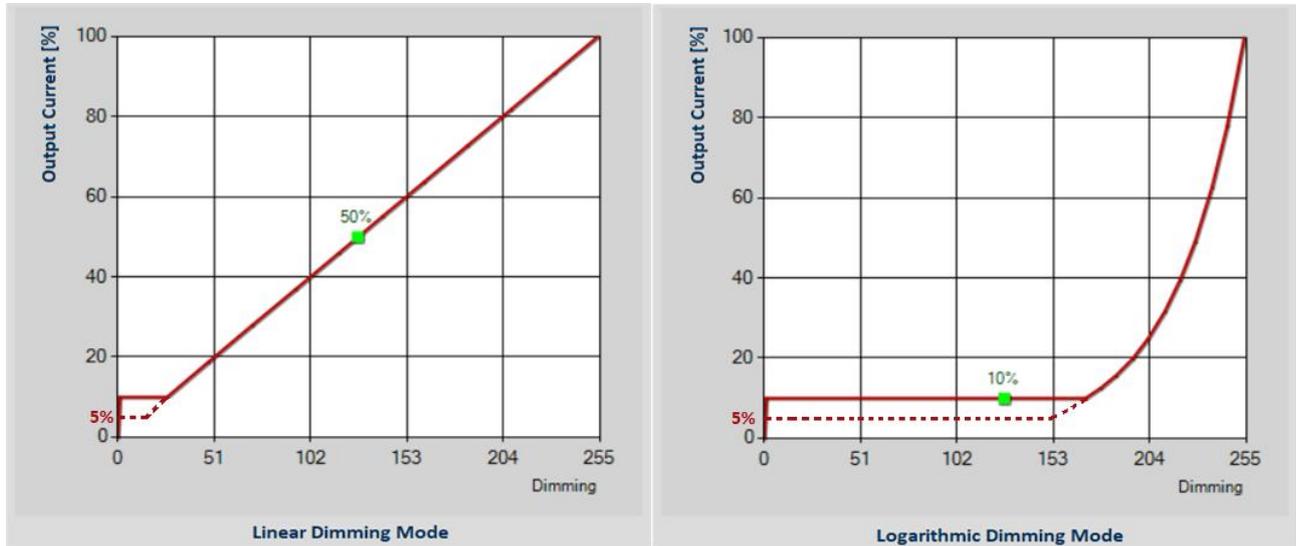

- 5%<sub>MAX</sub> minimum dimming level option through factory set up
- Programmable Output Current Timing: 7 segments 0-to-100% each
- Programmable Constant Lumen Output: 14 steps over 60000 hours
- Driver Over Temperature Protection: Start derating and end derating temperatures, minimum 20% I<sub>SET</sub>. Driver data record
- LED Module Over Temperature Protection: Start derating and end derating temperatures, NTC Constant (BETA). LED module data recording

## NTC DIMMING

The DLD600 can read and control the LED module temperature by connecting it to a 100 kΩ NTC thermistor directly assembled onto the LED module deemed as the most representative for thermal reference point.

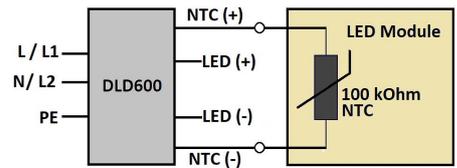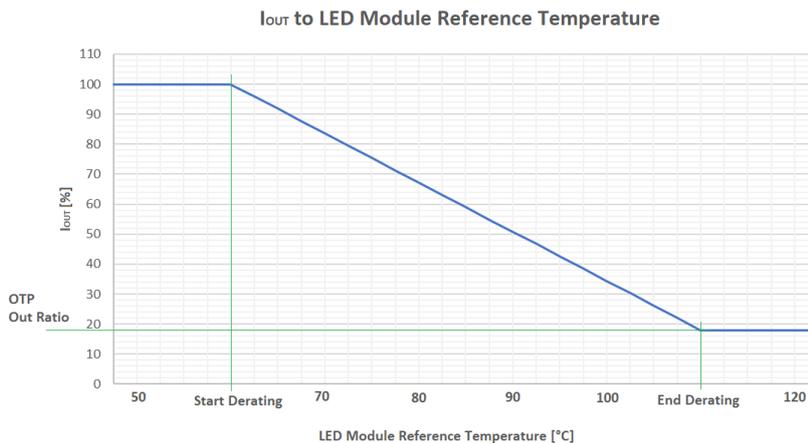

When the temperature exceeds a predetermined “Start Derating” threshold value, the output current provided to the LED module will automatically and gradually decrease to bring the temperature of the LED module back to safe values.


In case that temperature keeps increasing, despite current dimming, up to the “End Derating”, the DLD600 will set its output current to the value programmed by customer “OTP Out Ratio”.

While “Start Derating”, “End Derating” and “OTP Out Ratio” thresholds can be user programmable, the driver has been factory set considering a 100 kΩ, 4050 K standard NTC. See DLD600 Programming User Manual for instructions. The DLD600 can be made compatible with a 10 kΩ NTC through factory special set up.

LED module temperature measurement accuracy may depend on the load condition.

## MECHANICAL DETAILS AND OUTLINE DRAWING

Packaging:	ADC12 (A384) die cast aluminium alloy
Finishing:	Powder coating, colour grey anthracite
Enclosure:	IK08
Ingress Protection:	IP66
Environment Corrosion Grade:	C5M (ISO 12944-2) or 1000 hours saline fog w/o corrosion grade (under test)
Overall Dimensions:	144.0 x 335 x 58.6 mm (5.67 x 13.19 x 2.31)
Mass:	3.1 kg ±2%
Note:	PWA potted

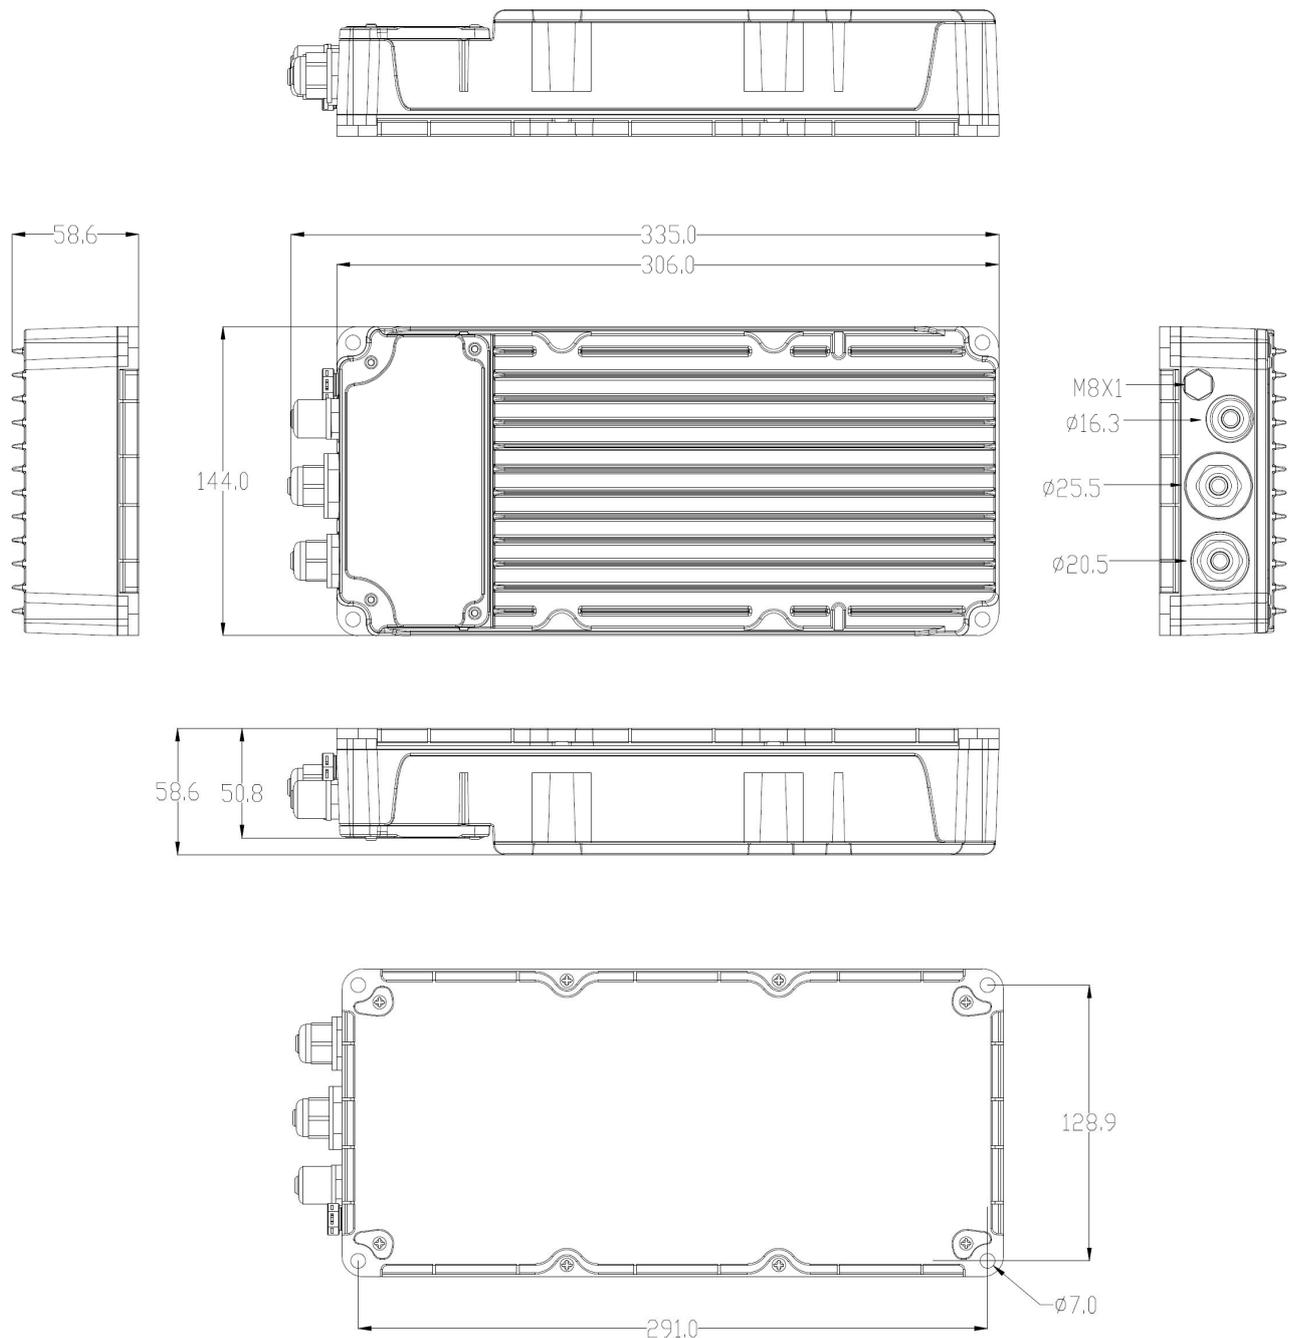

**OUTLINE DRAWINGS AND INPUT/OUTPUT CONNECTIONS**




**AC INPUT, DC OUTPUT, COMMUNICATION BUS  
WAGO 264**



Connection technology	CAGE CLAMP*
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Note (conductor cross-section)	12 AWG: THHN, THWN
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Wiring direction	Front-entry wiring

---

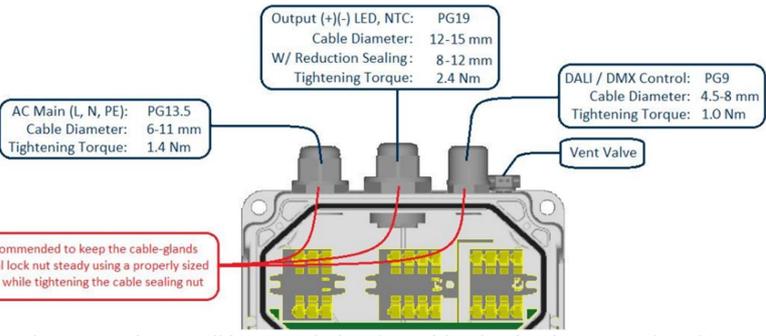

**AC Main (L, N, PE):** PG13.5  
Cable Diameter: 6-11 mm  
Tightening Torque: 1.4 Nm

**Output (+)(-) LED, NTC:** PG19  
Cable Diameter: 12-15 mm  
W/ Reduction Sealing: 8-12 mm  
Tightening Torque: 2.4 Nm

**DALI / DMX Control:** PG9  
Cable Diameter: 4.5-8 mm  
Tightening Torque: 1.0 Nm

**Vent Valve**

*It is recommended to keep the cable-glands external lock nut steady using a properly sized wrench while tightening the cable sealing nut*



**NOTE:** Each DLD600 driver will be provided with a cable-gland reduction gaskets kit

**JUNCTION BOX LID FIXING SCREWS:**  
Type: Stainless steel M3x10 T10  
Recommended tightening torque: 8-10 kg.cm



**ENVIRONMENTAL SPECIFICATIONS**

Specification	Test Conditions / Notes	Min	Nom	Max	Units
Top Case Temperature Range	7 years warranty 70°C case temperature	-40	-	90	°C
Ambient Temperature Range		-40	-	50	°C
Storage Temperature	Relative Humidity 5-85% non-condensing	-40	-	85	°C
Cooling	Convection cooled				
Shock EN 60068-2-27	Operating: Half sine 30 g/18 ms, 3 axes, 6x each (3 positive and 3 negative) Non-Operating: Half sine, 50 g/11 ms, 3 axes, 6x each (3 positive and 3 negative)				
Vibration EN 60068-2-64	Operating: 5-500 Hz, 1g <sub>RMS</sub> (0.02 g <sup>2</sup> /Hz), 3 axes, 30 min, random Non-Operating: 5-500 Hz, 2.46 g <sub>RMS</sub> (0.0122 g <sup>2</sup> /Hz), 3 axes, 30 min, random				
Vibration EN 60068-2-6	Operating Sine, 10-500 Hz, 1 g, 3 axes, sweep 1 Oct/min., 60 min, 1 g - survival				
MTBF	Telcordia SR-332 Issue 4 (25 °C ambient, max load, duty 50%)	200	-	-	hours
Useful Life	At max load, (70 °C T <sub>c</sub> and 45 °C T <sub>AMB</sub> )	-	75.000	-	hours

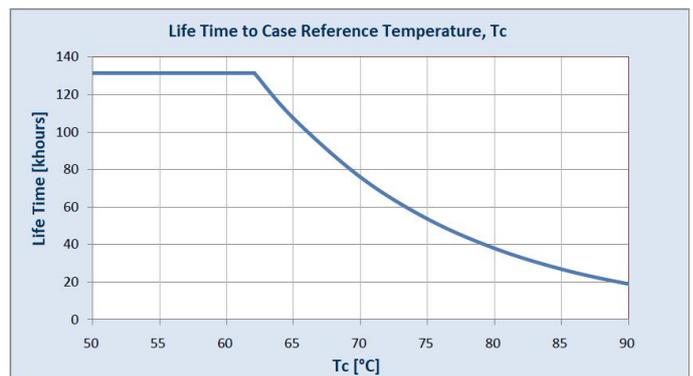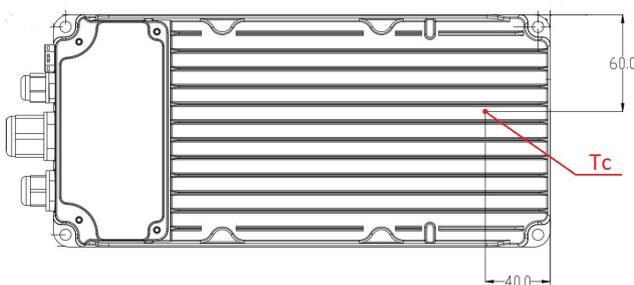

## ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

Phenomenon	Conditions / Notes	Standard	Performance Class
Conducted Emission	Test at 220/400/480 V <sub>AC</sub>	EN55015	
Radiated Emission	Test at 220/400/480 V <sub>AC</sub>	EN55015	
Conducted Emission	Test at 220/400/480 V <sub>AC</sub>	EN55032	Class B
Conducted and Radiated Emission	Test at 220/400/480 V <sub>AC</sub>	FCC CFR47- part 15/subpart B	Class B
Harmonic Current Emissions		EN61000-3-2	Class C (Load>25%)
Voltage Changes, Fluctuation and Flicker		EN61000-3-3	

NOTE: The DLD600HE-H120 drivers comply with the EMC standards and relative limits above as a stand-alone device. Once the drivers are being integrated into a luminaire, EMC should be assessed considering the whole system which includes driver, LED luminaire and any other devices connected to the driver.

## ELECTROMAGNETIC COMPATIBILITY (EMC) – IMMUNITY

Phenomenon	Conditions / Notes	Standard	Note
Equipment for general lighting purposes -EMC Immunity Req.		EN 61547	
ESD (Electrostatic Discharge)		EN 61000-4-2	
Radiated Radio-Frequency electromagnetic field		EN 61000-4-3	
Electric Fast Transient / Burst		EN 61000-4-4	
Surge	Level ±6 kV L-N; ±10 kV L/N-PE	EN 61000-4-5	
Conducted disturbances induced by Radio-Frequency fields		EN 61000-4-6	
Voltage Dips, short interruptions, and Voltage Variations		EN 61000-4-11	
Non-repetitive damped oscillatory transient, Ring wave	2.5 kV	ANSI C.62.41	Category A

## SAFETY STANDARDS AND AGENCIES APPROVALS

	EN 61347-2-13:2014+A1 EN 61347-1:2015+A1 EN IEC 62384:2020 EN 62262:2002+A1	MARK
	UL 8750 – Equipment for lighting products, CSA C22.2 No.250.13-22 – LED equipment for lighting applications LED Driver suitable for dry and damp location	MARK
	AS 61347-2-13, AS/NZS 61347-1	MARK
	CE and UKCA declaration of Conformity	MARK
	CB report	REPORT
	IEC 61347-1, IEC / EN 61347-2-13, IEC / EN 61347-2-7, IEC / EN 62384 : 2020	MARK

The DLD600HE-H120 design and construction makes it compliant with FCC, Russian and Chinese safety standards although not certified yet.

Specifications appearing in ENEDO's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings, and other particulars (including dimensions, materials, and performance data) given by ENEDO are as accurate as possible but, being given for general information, and are not binding on ENEDO. ENEDO makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. ENEDO assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.